

# Fulflo® Basket Strainers

■ 316 Stainless Steel

*Filter Bag & Media Strainer Series*

## Effective Large Particle Removal With FulFlo® Basket Strainers

Fulflo basket strainers effectively remove large-sized particles ranging from US Mesh 20 to 100 (840µm to 149µm) from liquids with viscosities of up to 15,000 SSU. Parker basket strainers are useful as prefilters for the collection of gross contaminants.

### Applications


- Discharge Water
- Process Water
- Coolants
- Cutting Oils
- Inks
- Lubricants
- Paints
- Resins
- Solvents
- Bulk Chemicals
- Parts Washing Systems
- Adhesives



### Features and Benefits

- Available in two standard sizes to fit all Fulflo bag filter vessels.
- Each strainer constructed of 316 stainless steel and features a permanent handle for easy installation, removal and cleaning.
- Fulflo strainer vessels designed for maximum operating pressures of up to 10 bar and high flow rates.
- Cleanable permanent media.

Process Filtration Division

 **WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.** This document and other information from Parker Hannifin Corporation, its subsidiaries and authorised distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyse all aspects of your application and review the information concerning the product or system in the current product catalogue. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection for the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

 Parker  
Filtration

# Filter Bag & Media Strainer Series

## Specifications

### Maximum Operating Pressure Differential:

150 psid (10.3 bar)

### Length:

(Basket Only)

- Single = 14-3/4 in (37 cm)
- Double = 27-3/4 in (70 cm)

### Length:

(Including Handle)

- Single = 18-3/4 in (47 cm)
- Double = 31-3/4 in (80 cm)

### Length:

- Single = 7-7/16 in (19 cm)
- Double = 7-7/16 in (19 cm)

### Basket Capacity:

- Single = 2.2 gal (8.3 litres)
- Double = 4.3 gal (16.3 litres)

### Weight:


- Single = 5.4 lbs (2.45 kg)
- Double = 9.4 lbs (4.3 kg)

### Mesh Surface Area:

- Single = 2.3 ft<sup>2</sup> (2139 cm<sup>2</sup>)
- Double = 4.2 ft<sup>2</sup> (3906 cm<sup>2</sup>)

## Pressure Drop Determination for Fulflo® Basket Strainers:

1. From the pressure drop chart below, determine the pressure drop through the vessel using the known flow rate and inlet/outlet size. The chart is for water flowing through a vessel containing a clean 20 mesh basket.
2. To determine the pressure drop for a vessel with other strainers, multiply the above value by the appropriate correction factor in the following table (water only):
3. Correction factor for liquids other than water:
  - a: Multiply pressure drop water, determined by completing steps 1 and 2, by the specific gravity of the liquid.
  - b: Multiply the results of "a" by the viscosity and mesh correction factor in the table below.

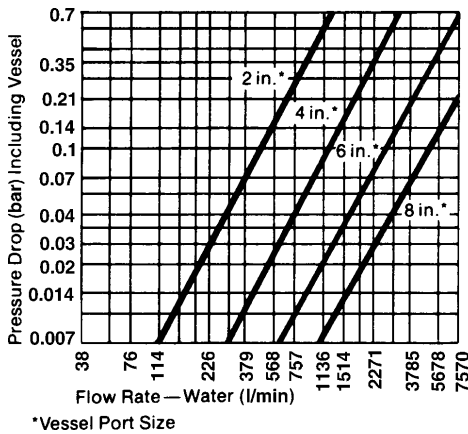

Water Correction Factor	
20 Mesh	1.0
40 Mesh	1.2
60 Mesh	1.4
80 Mesh	1.6
100 Mesh	1.7

## Mesh Correction Factors

Viscosity SSU	20 Mesh	40 Mesh	60 Mesh	80 Mesh	100 Mesh
500	1.6	1.9	2.1	2.4	2.6
1,000	1.7	2.2	2.4	2.6	2.8
2,000	1.9	2.4	2.7	2.9	3.2
3,000	2.0	2.6	2.9	3.2	3.5
5,000	2.2	3.0	3.5	4.0	4.5
10,000	2.5	3.5	4.2	5.0	6.0

## Ordering Information

### Strainer Baskets With Handles

Single Length, Stainless Steel	Part Number	Double Length, Stainless Steel	Part Number
1/8 in Perforations	0370-5177	1/8 in Perforations	0370-5156
20 Mesh (840µm)	0370-5059	20 Mesh (840µm)	0370-5064
40 Mesh (420µm)	0370-5060	40 Mesh (420µm)	0370-5065
60 Mesh (250µm)	0370-5061	60 Mesh (250µm)	0370-5066
80 Mesh (177µm)	0370-5062	80 Mesh (177µm)	0370-5067
100 Mesh (149µm)	0370-5063	100 Mesh (149µm)	0370-5068

## Process Filtration Division

Parker Filtration  
 Filter Division Europe  
 Shaw Cross Business Park  
 Dewsbury, West Yorkshire  
 WF12 7RD, England  
 Phone: +44 (0) 1924 487000  
 Fax: +44 (0) 1924 487001  
 Website: www.parker.com

